



■ Specifications

Model No.	FX-838
Power Consumption	158 W
● Station	
Output Voltage	AC 27 V
Temperature Range	200 to 500°C
Temperature Stability	±5°C at idle temperature
Dimensions	110 (W) x 110 (H) x 205 (D) mm
Weight	3.2 kg
● Soldering iron	
Power Consumption	150 W (27V)
Tip to Ground Resistance	<2
Tip to Ground Potential	<2 mV
Heating Element	Ceramic heater
Cord Length	1.2 m
Total Length (w/o cord)	175 mm (with 2.4D tip)
Weight (w/o cord)	31 g (with 2.4D tip)


■ Replacement and Optional Parts

Part No.	Name/Description
FX8302-01	N <sub>2</sub> soldering iron 150 W (27 V)

■ Packing List

Station, Handpiece (FX-8301), Control card, Power cord, Heat resistant pad, Connecting cable, Iron holder, Instruction manual

■ Optional Tips

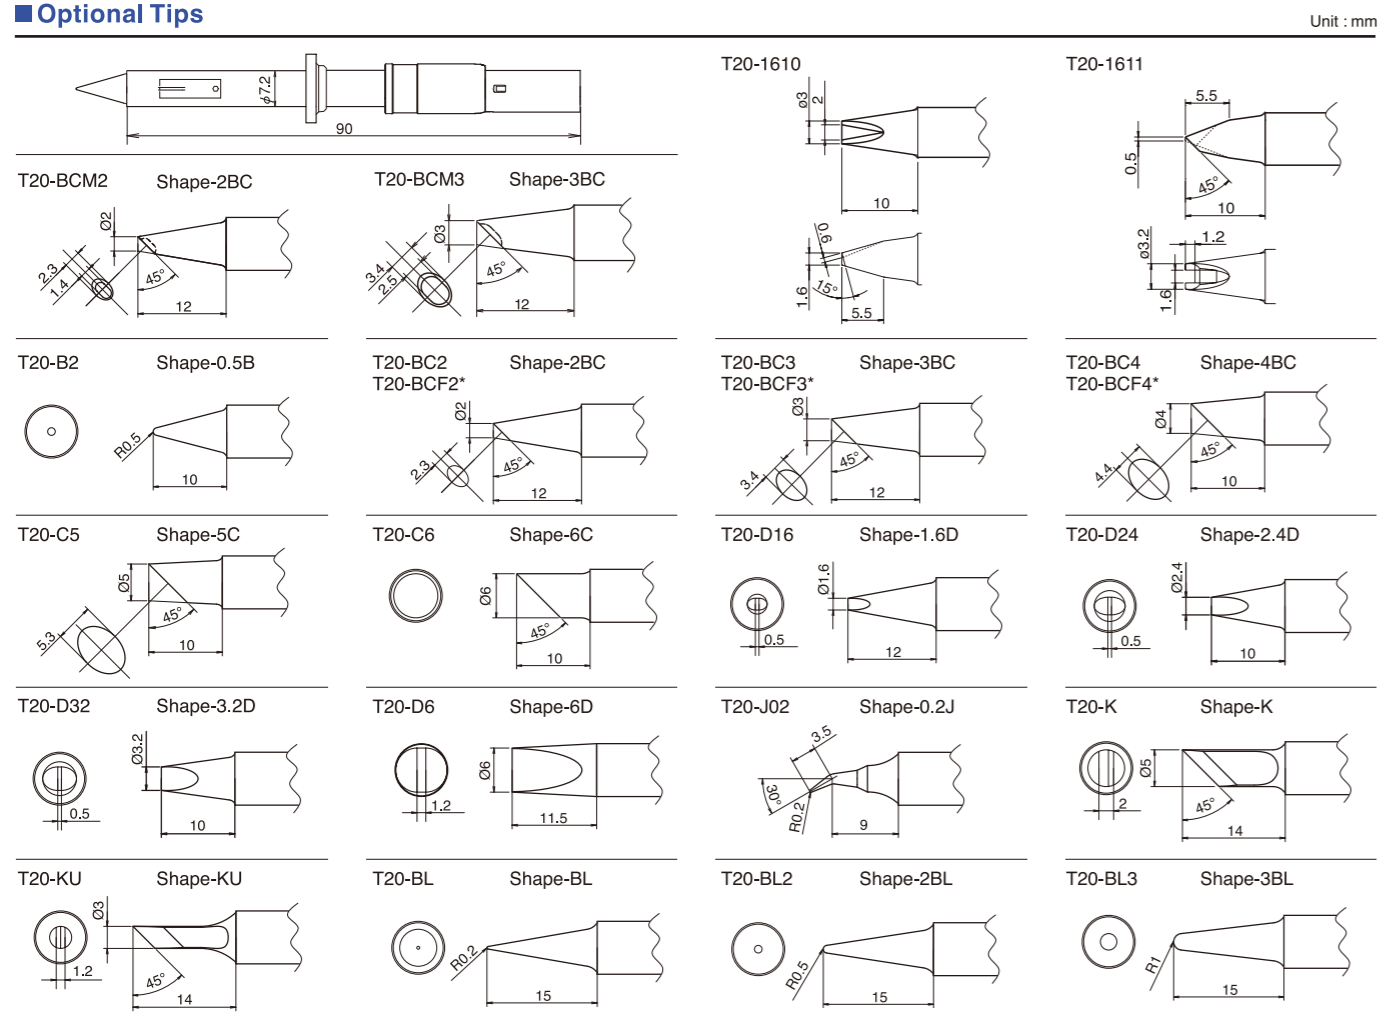

\* These tips are tinned on the soldering surface only.

**HAKKO**  
HAKKO CORPORATION  
OVERSEAS AFFILIATES

**HEAD OFFICE**  
4-5, SHIOKUSA 2-CHOME, NANIWA-KU, OSAKA, 556-0024 JAPAN  
TEL:+81-6-6561-3225 FAX:+81-6-6561-8466  
http://www.hakko.com E-mail:sales@hakko.com

**U.S.A.**  
AMERICAN HAKKO PRODUCTS, INC.  
28920 AVENUE WILLIAMS VALENCIA, CA 91355, U.S.A.  
TEL: (661) 294-0090 FAX: (661) 294-0096  
To: Free (800)88-HAKKO  
http://www.hakkousa.com

**HONG KONG**  
HAKKO DEVELOPMENT CO., LTD.  
ROOM 1504, EASTERN HARBOUR CENTRE,  
28 HOI CHAK STREET, QUARRY BAY, HONG KONG.  
TEL: 2811-5588 FAX: 2590-0217  
http://www.hakko.com.hk  
E-mail:info@hakko.com.hk

**SINGAPORE**  
HAKKO PRODUCTS PTE LTD  
1, GENTING LINK #02-04  
PERFECT ONE, SINGAPORE 349518  
TEL: 6748-2277 FAX: 6744-0033  
http://www.hakko.com.sg  
E-mail:sales@hakko.com.sg

Please access to the following for the other sales affiliates and distributors.  
<http://www.hakko.com>

Specifications and design are subject to change without notice. Copyright HAKKO Corporation. All right reserved.  
HAKKO is registered in countries and regions including the following. Japan, USA, South Korea, Singapore, China, the member of CTM.

**150W**

# Heavy-duty soldering iron

Good news for users struggling with soldering power-supply boards, multilayer boards, heat sinks and shield cases, which require high heat capacity! Outstanding performance solves these challenging problems.



HIGH POWER




# HIGH POWER



## High power 150W

### Great thermal recovery

150W hand piece provides great thermal recovery, which allows soldering at lower set temperatures to minimize concern about the influence of heat on components and tip life.

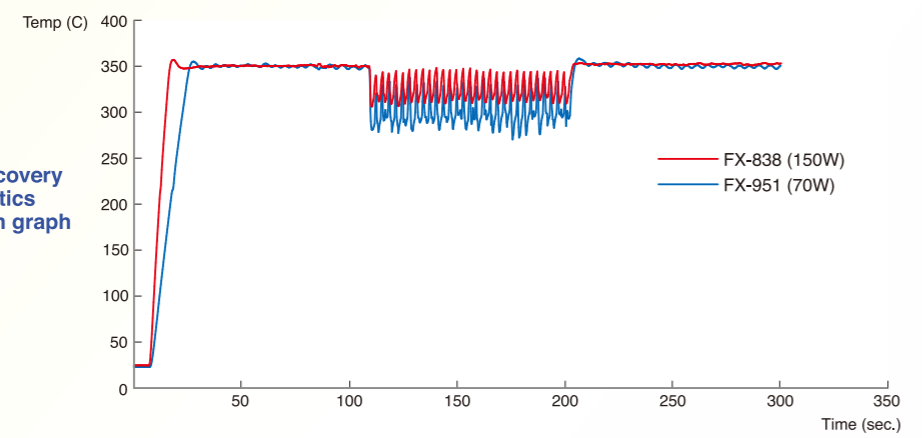

● Thermal recovery characteristics comparison graph


【 Test criteria 】 ● Tip shape: 2.4D Board: Paper phenol copper Solder: ø 1.6 x 5mm Cycle: Every 3 sec. ● Lead-free solder is used.

### Improvement of work efficiency

- It is suitable for soldering power-supply boards, multilayer boards, heat sinks and shield cases, which require high heat capacity. It is also appropriate for soldering multilayer boards on which fine and micro components have been mounted.
- It has beneficial effects on lead-free soldering, for which the melting point is high.

### Easy to replace tips

Tips can be quickly and easily replaced because they are of the cartridge type.

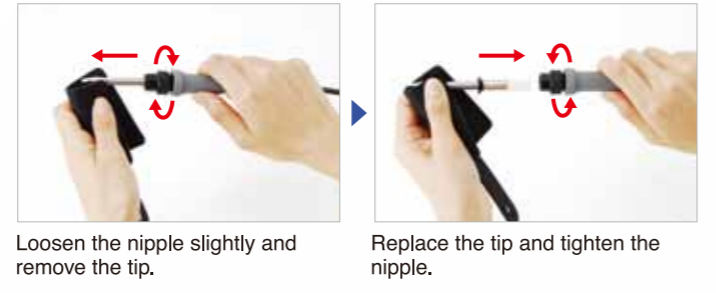


### Available 20 different shapes as the replacement tip

To match various application, from large to fine components, we reviewed the shape of each tip type in detail and pursued heat efficiency and ease of use. (For tip shapes, please refer to the back cover.)

### Equipped with high-power mode


If the work efficiency in the standard mode is not enough when soldering heat sinks, shield cases and chassis, which require high heat capacity in particular, changing to the high-power mode provides more powerful soldering.

\* When this mode starts, fluctuation in temperature may occur.



### Temperature preset mode

The temperature preset mode allows you to input three frequently-used temperatures in advance and recall them with one push of a button.

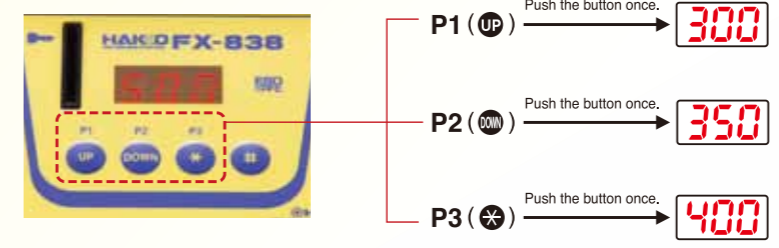

\* Factory default is nomal. Change the parameter to use 'temperature preset mode'.  
\* Factory default: 300C for P1, 350C for P2 and 400C for P3

#### Example

- For setting the temperature according to the tip shape or application.
- For the temperature setting by different operators.


One push of a button can quickly recall each setting.

#### A great change!

- Because 500C is the maximum setting temperature, work which is assumed to suffer from insufficient thermal power can be done.

### Thermal control function

- The temperature setting can be locked with the control card.
- An alarm can be set to inform that the preset lower limit has been reached.
- Easy temperature offset.



### Auto sleep function

- Function to minimize oxidation of the tip and extend the service life of the tip

The auto sleep function activates for an arbitrarily-set time after the iron is inserted into the iron holder to decrease the tip temperature. (The auto sleep temperature setting range is 200C to 300C.) Setting the sleep temperature higher can reduce the time until start-up after releasing the sleep mode.

### Auto power shut off function

- Energy-saving function

Auto power shut off activates 30 minutes after the iron is inserted into the iron holder and left unused.

### Tip cleaner 599B included as a standard accessory

The tip cleaner with the water-free wire-type can be used instead of the cleaning sponge.

### The auto power shut-off and auto sleep functions operate while linked to the iron holder.

\* It is necessary to set up the connection before using the link function.

