ESD CENTER

WE PROTECT AND SERVE THE ELECTRONIC INDUSTRY.

ESD Polo Shirt Woman

Article Number: Navy Blue: 210-2020-0XX, Grey: 210-2030-0XX, Black: 210-2090-0XX

DESCRIPTION

ESD-Center's polo shirt provides reliable static protection in EPA zones. Integrated conductive fibers dissipate electrostatic charges, while the comfortable, modern fit ensures freedom of movement and a professional appearance. Ideal for electronics manufacturing, laboratories, service, and customer visits.

The women's model features an elegant fit, a button-free collar, a practical left sleeve pocket, and an ESD logo on the right sleeve.

SPECIFICATIONS

- Woman
- Color: Navy Blue, Grey & Black
- Available sizes: XXS - 4XL
- 48% Cotton, 48% Polyester, 4% Conductive Fibers
- One sleeve pocket
- Machine wash 40°C
- 195g/m²
- Complies with IEC 61340-5-1




avanti esd

ESD CENTER

TECHNICAL DATA

	Test Method	Limits	Values
Point to Point Resistance	IEC 61340-4-9	$< 1 \times 10^9\ \Omega$	10^6–$10^7\ \Omega$

MEASUREMENT LIST		STYLE NO: ESD 006
O/N:		WOMEN
DATE: 2025-10-15		QUALITY: according to BOM

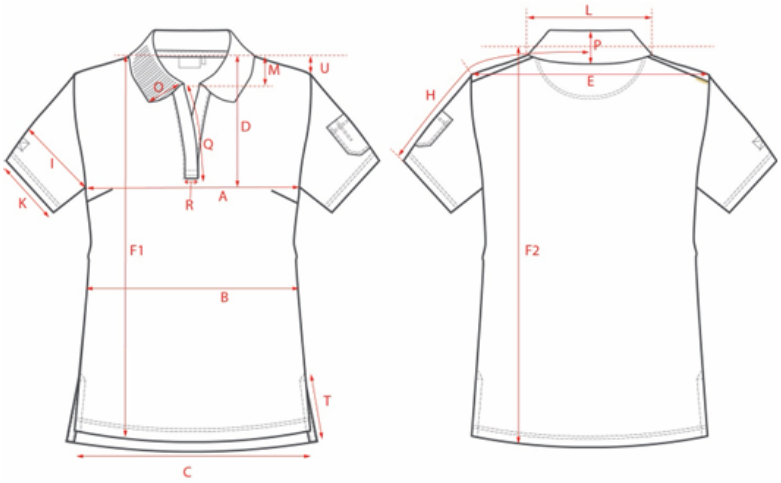

SIZES:		XXS	XS	S	M	L	XL	2XL	3XL	4XL	5XL	Tolleren ce
A	1/2 Chest	42	45	48	51	54	58	62	66	69	71,5	1
B	1/2 Waist	40	43	46	49	52	56	60	64	67	69,5	1
C	1/2 Hem / Bottom	44	47	50	53	56	60	64	68	71	73,5	1
D	Scye depth from shoulder	22	22,5	23	24	25	26	27	28	28,5	29	0,5
E	shoulder to shoulder width	36	37,5	39	40,5	42	44	46	47,5	48,5	49	0,8
F1	C.front length from HSP	66	67	68	69,5	71	72,5	73,5	74,5	75,5	76,5	0,7
F2	C.back length from HSP	68	69	70	71,5	73	74,5	75,5	76,5	77,5	78,5	0,7
H	Sleeve length from CB	34	35,5	37	38,5	40	41	42	43	44	44	0,7
I	1/2 Bicept	16,5	17,5	18,5	19,5	20,5	21,5	22,5	23,5	24,5	25	0,5
K	1/2 Bottom sleeve	14,9	15,6	16,3	17	17,7	18,7	19,7	20,4	21,3	22,1	0,5
L	Neckwidth straight	15,5	16	16,5	17	17,5	18	18,5	18,5	19	19	0,5
M	Neckdrop front	6,4	6,7	7	7,3	7,6	7,9	8,2	8,5	8,8	9,1	0,2
N	Neckdrop back	2	2	2	2	2	2	2	2	2	2	0,2
O	Collar point	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	0,2
P	Collar height CB	6,5	6,5	6,5	6,5	6,5	6,5	6,5	6,5	6,5	6,5	0,2
Q	Front placket length	14	14	15	15	16	16	16,5	16,5	17	17	0,5
R	Front placket width	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	0,2
T	Side slit lenght front	4	4	4	4	4	4	4	4	4	4	0,2

ESD-Center AB
Rättarevägen 2
SE - 235 39 Vellinge
Sweden
+46 40 36 32 40
order@esd-center.se
www.esd-center.se

ESD-Center AS
Koloniveien 43
NO - 2072 Dal
Norway
+47 63 95 20 00
order@esd-center.no
www.esd-center.com

ESD-Center OU
Allika tee 1
EE - 753 12 Harjumaa
Estonia
+46 40 36 32 40
warehouse@esd-center.ee
www-esd-center.com

ESD-Center APS
Haderslevvej 36
DK - 6000 Kolding
Denmark
+45 96 17 08 18
order@esd-center.dk
www.esd-center.com