ESD CENTER

WE PROTECT AND SERVE THE ELECTRONIC INDUSTRY.

ESD Polo Shirt Unisex

Article Number: Navy Blue: 210-2220-0XX, Grey: 210-2230-0XX, Black: 210-2290-0XX

DESCRIPTION

ESD-Center's polo shirt provides reliable static protection in EPA zones. Integrated conductive fibers dissipate electrostatic charges, while the comfortable, modern fit ensures freedom of movement and a professional appearance. Ideal for electronics manufacturing, laboratories, service, and customer visits.

The unisex model features a classic polo design with a three-button collar and is equipped with a practical pocket on the left sleeve and an ESD logo on the right sleeve.

SPECIFICATIONS

- Unisex
- Color: Navy Blue, Grey & Black
- Available sizes: XXS - 7XL
- 48% Cotton, 48% Polyester, 4% Conductive Fibers
- One sleeve pocket
- Machine wash 40°C
- 195g/m²
- Complies with IEC 61340-5-1




avanti esd

ESD CENTER

Technical data

	Test Method	Limits	Values
Point to Point Resistance	IEC 61340-4-9	$< 1 \times 10^9\ \Omega$	10^6–$10^7\ \Omega$

MEASUREMENT LIST		STYLE NO: ESD 004
)/N:		MEN
)ATE: 2025-10-15		QUALITY: according to BOM

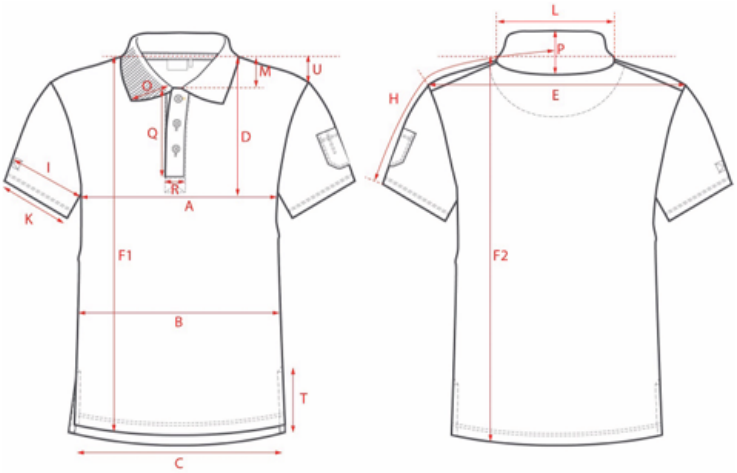

SIZES:		XS	S	M	L	XL	2XL	3XL	4XL	5XL	6XL	7XL	Toller
A	1/2 Chest	47	50	53	56	59	62	66	70	74	77	80	1
B	1/2 Waist	47	50	53	56	59	62	66	70	74	77	80	1
C	1/2 Hem / Bottom	47	50	53	56	59	62	66	70	74	77	80	1
D	Scye depth from shoulder	24	25	26	27	28	29	30,5	32	33	34	34,5	0,5
E	shoulder to shoulder width	42	44	46	48	50	52	54	55,5	57	58	59	0,8
F1	C.front length from HSP	69	71	73	75	77	79	81	83	85	86	87	0,7
F2	C.back length from HSP	71	73	75	77	79	81	83	85	87	88	89	0,7
H	Sleeve length from CB	43	44,5	46	47,5	49	50,5	52	53,5	54	54,5	54,5	0,7
I	1/2 Bicept	20	21	22	23	24	25,5	27	28,5	30	31	32	0,5
K	1/2 Bottom sleeve	15,4	16,1	16,8	17,5	18,2	19,2	20,2	21,3	22,1	22,9	23,6	0,5
L	Neckwidth straight	14,5	15,5	16,5	17,5	18,5	19,5	20,5	21,5	22,3	22,9	23,5	0,5
M	Neckdrop front	8,1	8,3	8,5	8,7	8,9	9,1	9,3	9,5	9,7	9,9	10,1	0,2
N	Neckdrop back	1	1	1	1	1	1	1	1	1	1	1	0,2
O	Collar point	6	6	6	6	6	6	6	6	6	6	6	0,2
P	Collar height CB	6,5	6,5	6,5	6,5	6,5	6,5	6,5	6,5	6,5	6,5	6,5	0,2
Q	Front placket length	15	15	16	16	16	16	16,5	16,5	17	17	17	0,5
R	Front placket width	3	3	3	3	3	3	3	3	3	3	3	0,2
T	Side slit lenght front	6	6	6	6	6	6	6	6	6	6	6	0,2

ESD-Center AB
Rättarevägen 2
SE - 235 39 Vellinge
Sweden
+46 40 36 32 40
order@esd-center.se
www.esd-center.se

ESD-Center AS
Koloniveien 43
NO - 2072 Dal
Norway
+47 63 95 20 00
order@esd-center.no
www.esd-center.com

ESD-Center OU
Allika tee 1
EE - 753 12 Harjumaa
Estonia
+46 40 36 32 40
warehouse@esd-center.ee
www-esd-center.com

ESD-Center APS
Haderslevvej 36
DK - 6000 Kolding
Denmark
+45 96 17 08 18
order@esd-center.dk
www.esd-center.com