ESD CENTER

WE PROTECT AND SERVE THE ELECTRONIC INDUSTRY.

ESD Coat Unisex

Article Number: Navy Blue: 210-1025-0XX, Grey: 210-1030-0XX, Black: 210-1090-0XX, White: 210-1015-0XX

DESCRIPTION

ESD-Center's short coat provides reliable static protection in EPA zones and other ESD-sensitive environments. Its lightweight, breathable fabric with integrated conductive fibers dissipates electrostatic charges while ensuring comfort and freedom of movement. Ideal for electronics manufacturing, assembly, laboratories, and service operations. Features a concealed front placket, adjustable cuffs with plastic snap fasteners, roll-up sleeves with concealed button tabs, and spacious pockets for everyday essentials.

SPECIFICATIONS

- Unisex
- Color: Navy Blue, Grey, Black & White
- Available sizes: XXS - 7XL
- 63% Polyester, 33% Cotton, 4% Conductive Fibers
- Machine wash 40°C
- 155 g/m²
- Complies with IEC 61340-5-1




avanti esd

ESD CENTER

TECHNICAL DATA

	Test Method	Limits	Values
Point to Point Resistance	IEC 61340-4-9	$< 1 \times 10^9\ \Omega$	10^6–$10^7\ \Omega$

MEASUREMENT LIST		STYLE NO: ESD 005
O/N:		UNISEX
DATE: 2025-10-15		QUALITY: according to BOM

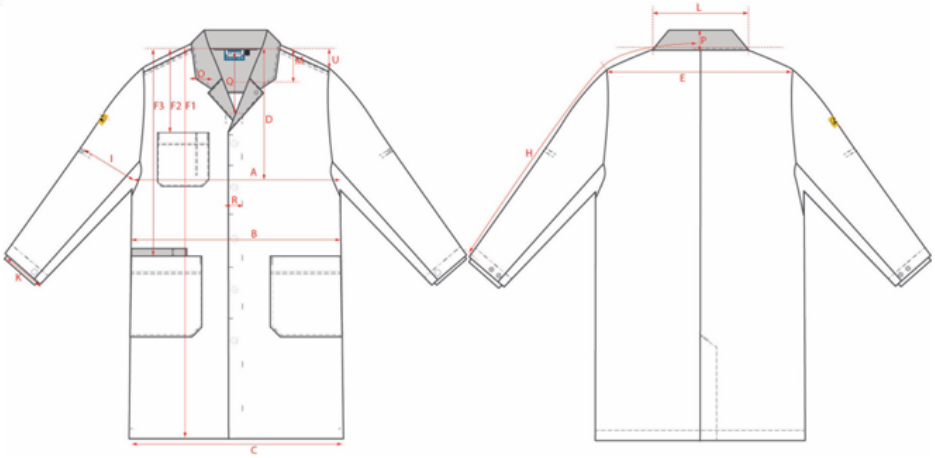

SIZES:		XXS	XS	S	M	L	XL	2XL	3XL	4XL	5XL	6XL	7XL	Tolleranc
A	1/2 Chest	53	56	59	62	65	68	71	75	79	83	86	89	1
B	1/2 Waist	53	56	59	62	65	68	71	75	79	83	86	89	1
C	1/2 Hem / Bottom	55	58	61	64	67	70	73	77	81	85	88	91	1
D	Scye depth from shoulder	30	31	32	33	34	35	36	37	38	39	40	41	0,5
E	shoulder to shoulder width	43,5	45,5	47,5	49,5	51,5	53,5	55,5	57,5	59	60,5	62	63,5	0,8
F1	C.front length from HSP	81,5	83,5	85,5	87,5	89,5	91,5	93,5	95,5	97,5	98,5	99,5	100	0,7
F2	Height of chest pocket fr HSP	14,5	16,5	18,5	20,5	22,5	24,5	26,5	28,5	30,5	31,5	32	32,5	0,5
F3	Height of front pocket fr HSP	49	51	53	55	57	59	61	63	65	66	67	67,5	0,5
H	Sleeve length from CB	88	89,5	91	92,5	94	95,5	97	98,5	100	101,5	102,5	103,5	0,7
I	1/2 Bicept	23,5	24,5	25,5	26,5	27,5	28,5	29,5	31	32,5	34	35	36	0,5
K	1/2 Bottom sleeve	11,2	11,9	12,6	13,3	14	14,7	15,4	16,4	17,4	18,5	19,2	19,5	0,5
L	Neckwidth straight	16	16,5	17	17,5	18	18,5	19	19	19,5	19,5	20	20	0,5
M	Neckdrop front	7,6	7,9	8,2	8,5	8,8	9,1	9,4	9,4	9,7	9,7	10	10	0,2
N	Neckdrop back	2	2	2	2	2	2	2	2	2	2	2	2	0,2
O	Collar point	7	7	7	7	7	7	7	7	7	7	7	7	0,2
P	Collar height CB	7,5	7,5	7,5	7,5	7,5	7,5	7,5	7,5	7,5	7,5	7,5	7,5	0,2
Q	Front V-neck depth			please grade		18	please grade							0,5
R	Front placket width	4	4	4	4	4	4	4	4	4	4	4	4	0,2

ESD-Center AB
Rättarevägen 2
SE - 235 39 Vellinge
Sweden
+46 40 36 32 40
order@esd-center.se
www.esd-center.se

ESD-Center AS
Koloniveien 43
NO - 2072 Dal
Norway
+47 63 95 20 00
order@esd-center.no
www.esd-center.com

ESD-Center OU
Allika tee 1
EE - 753 12 Harjumaa
Estonia
+46 40 36 32 40
warehouse@esd-center.ee
www-esd-center.com

ESD-Center APS
Haderslevvej 36
DK - 6000 Kolding
Denmark
+45 96 17 08 18
order@esd-center.dk
www.esd-center.com